


PRIVACY SCREEN

OPENNESS FACTOR 0.5%
SCREEN FABRIC

DFW
WINDOW COVERINGS


Known for its simplicity of design, balanced weave, application versatility, and overall excellent solar control performance. All colors are available in openness factors 1%, 3%, and 5% for ultimate daylight control.



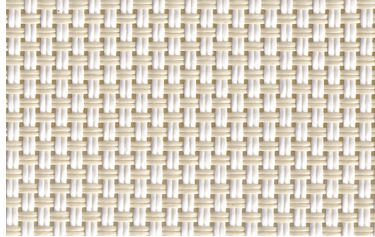


WHITE/LINEN

GSS-A2-002

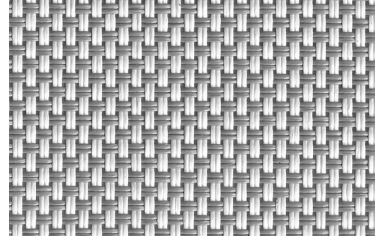


WHITE/GRAY

GSS-A2-003

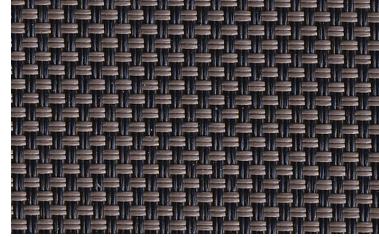


BLACK/BRONZE

GSS-A2-008

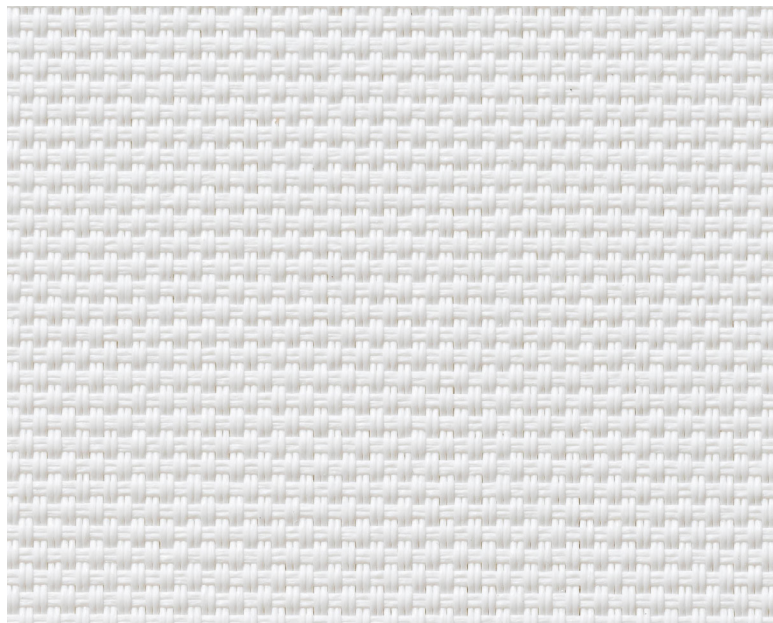


BRIGHT WHITE

GSS-A2-000

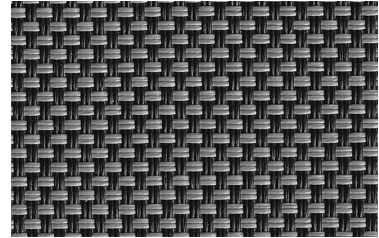

BLACK/GRAY

GSS-A2-010

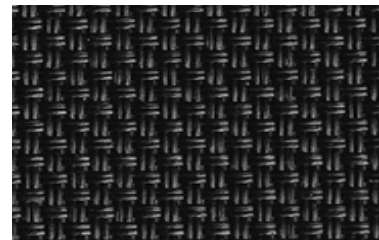

BLACK/BLACK

GSS-A2-011

FABRICATION METHODS

Cutting: Cold Cut, Ultrasonic, Crush Cut or Laser

Seaming / Hemming: Thermal, High-Frequency, Ultrasonic or Sewing.

PRODUCT SPECIFICATIONS

COMPOSITION	30% Polyester + 70% PVC
ROLL WIDTH	98" / 118"
ROLL LENGTH	33 yd
WEIGHT / YD ²	13.84 oz/yd ²
THICKNESS	.030" ± 5%
COLOR FASTNESS	8 Grade (SGS)
YARN COUNT	64*40
BREAKING STRENGTH	Warp 2060 N/5cm Weft 1300 N/5cm

CARE AND CLEANING

Remove dust with vacuum cleaner or compressed air. Do not scrub. Do not use solvents or any abrasive substance which might damage the coating on the fabric. Clean with a sponge or a soft brush dipped in soapy water using mild detergent. Rinse with clean water. Leave the shade down until completely dry. You can also rub the fabric very gently with a clean white pencil eraser to remove small stains.

CERTIFICATIONS, TESTS, AND WARRANTY

CALIFORNIA TITLE 19	OEKO-TEX® STANDARD 100	UL GREENGUARD GOLD	ROHS COMPLIANT	10 YEAR WARRANTY	ASTM G-21 & E-2180	NFPA® 701-TM
FLAME RETARDANT	FREE OF HARMFUL CHEMICALS	HEALTHY INDOOR AIR QUALITY	FREE OF HARMFUL METALS	QUALITY GUARANTEED	BACTERIA & FUNGAL RESISTANCE	FIRE RETARDANT